


PS210

- **BUILT TO RUN UP TO 2 LOCKS, EXIT TRIM & LP MOTOR / SOLENOID KITS**
- **ROBUST SOLID-STATE OUTPUTS - PROTECTS SYSTEM RELAYS**
- **ROCK SOLID BOARD DESIGN IMPROVES RELIABILITY**
- **BUILT TO LAST IN THE USA**

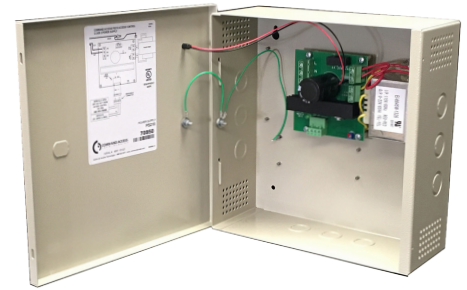

PS210 - 110-120VAC input power supplies that deliver (1.5) amps @ 24VDC to (1) PTC fused output. (1) solid-state input trigger, protects system relays from shorts, grounds and surges. Its regulated linear design makes it a perfect match for electric locks, motor or solenoid driven exit devices, electric strikes, and mag locks.

SPECIFICATIONS

Input Voltage:

- 120 VAC, 60 Hz,
- Input Fuse: 2 Amp Fuse @ 250VAC

Output Voltage:

- 1.5A @ 24VDC
- 1 Solid State I/O's - 1.5A auto resetting fused outputs
- Over-voltage protection
- Output Voltage trim pot

Fire Alarm:

- Fire alarm link

Electrical:

- Temperature range: 0 to 49° C; 32 to 120° F
- Maximum humidity: 85%

FEATURES

LED's:

- Red = A/C Power indicator
- Green = D/C Output indicator

Features & Benefits:

- Linear design insures ample inrush/hold current for latch retraction
- Door mounted LED Power Indicator
- Easy to remove euro connectors

Listings:

- UL294 6th Edition

Mechanical Details:

- Enclosure dimensions: PS210 (11" W x 11" H x 4" D).
- 1/2" & 3/4" knockouts on all sides
- Hinge-less removable cover; Cam lock not provided
- Product Weight: PS210 - 10lbs
- Shipment Weight: PS210 - 11lbs

How to Order



PART #	EASY ORDER #	DESCRIPTION
PS2	70000	2 Inputs/Outputs w/out battery back up.
PS2BB	70001	2 Inputs/Outputs w/ battery back up.

Power Supply Matrix

PS LINE 24VDC	AMPERAGE (CONTINUOUS)	AMPERAGE (BOOST)	INPUTS	OUTPUTS	BATTERY BACK-UP	FIRE ALARM LINK	24V POWER TAP (CONSTANT POWER)	LOCKING HARDWARE (MORTISE /CYLINDRICAL LOCK/EXIT TRIM)	LOCKING HARDWARE (MOTORIZED EXIT DEVICES)	LOCKING HARDWARE (SOLENOID EXIT DEVICE PM300)	LOCKING HARDWARE (SOLENOID EXIT DEVICE LP/PM300HO)	METAL ENCLOSURE
PS210	1.5	2.5	1	1	-	- ¹	-	2 ²	2 ²	2 ²	2 ²	S
PS220	2	3	2	2	-	✓	✓	2	2	2	2	S
PS220B	2	3	2	2	✓	✓	✓	2	2	2	2	L
PS440B	4	6	4	4	✓	✓	-	4	4	4	3	L
PS480B	4	6	8	8	✓	✓	-	8	8	8	-	L
PS202	2	3	2	2	-	✓	-	2	2	-	-	S
PS202B	2	3	2	2	✓	✓	-	2	2	-	-	L
PS204	2	3	4	4	-	✓	-	4	4	-	-	S
PS204B	2	3	4	4	✓	✓	-	4	4	-	-	L
PS1	1	-	1	1	-	- ¹	-	2 ²	2 ²	2 ²	2 ²	S
PS5-4	5	-	4	4	✓	✓	-	4	4	4	4	L

¹Can be wired in through the input, see instructions for more detail

²1 output powers 2 devices/locks simultaneously

SMALL ENCLOSURE: 11" x 11" x 4"

LARGE ENCLOSURE: 13" x 15.5" x 5"

US Customer Support 888-622-2377 | www.commandaccess.com | CA Customer Support 855-823-3002

Command Access is not a licensee, or affiliated, associated or connected with Allegion, Assa Abloy, Stanley, Schlage, Falcon, Von Duprin, Dorma, Sargent, Corbin Russwin, Yale, Emtek, Adams Rite, Best, Precision, Arrow, Design Hardware, Cal Royal, Jackson, Kawneer, AHT, Marshall Best, Marks, Accurate, Baldwin, FSB, PDQ, Lawrence, Trans Atlantic, Hager, LSDA, General Lock, or Omnia or any of their subsidiaries or affiliates.